

Bureau of Reclamation 2800 Cottage Way, MP-170 Sacramento, California 95825

Updated 2021 Restoration Allocation & Default Flow Schedule

February 19, 2021

Introduction

The following transmits an updated 2021 Restoration Allocation and Default Flow Schedule to the Restoration Administrator for the San Joaquin River Restoration Program (SJRRP), consistent with the January 2020 (version 2.1) Draft Restoration Flow Guidelines (Guidelines). This Restoration Allocation and Default Flow Schedule provides the following:

- <u>Forecasted water year Unimpaired Inflow</u>: the estimated flows that would occur absent regulation on the river. This value is also known as the "Natural River" or "Unimpaired Runoff" or "Full Natural Flow," and is utilized to identify the water year type.
- <u>Hydrograph Volumes</u>: the annual allocation hydrograph based on water year unimpaired inflow, utilizing Method 3.1 with the Gamma Pathway (RFG-Appendix C, Figure C3) agreed to by the Parties in December 2008.
- <u>Default Flow Schedule</u>: the schedule of Restoration Flows in the absence of a recommendation from the Restoration Administrator.
- <u>Additional Allocations</u>: the hypothetical Restoration Allocations that would result from 10%, 50%, 75%, and 90% probability of exceedance of the Unimpaired Inflow forecast.
- <u>Unreleased Restoration Flows</u>: the amount of Restoration Flows not released due to channel capacity constraints, without delaying completion of Phase 1 improvements.
- <u>Flow targets at Gravelly Ford</u>: the flows at the head of Reach 2, and estimated scheduled releases from Friant Dam adjusted for the assumed Holding Contract demands and losses in Exhibit B.
- <u>Restoration Budget</u>: the volumes for the annual allocation, spring flexible flow, base flow, riparian recruitment, and fall flexible flow.
- <u>Remaining Flow Volume</u>: the volume of Restoration Flows released, the remaining volume available, and associated limitations and flexibility.
- <u>Operational Constraints</u>: the flow release limitations based on downstream channel capacity, regulatory, or legal constraints.

Consistent with Paragraph 18 of the Settlement, the Restoration Administrator shall make recommendations to the Secretary of the Interior concerning the manner in which the hydrographs shall be implemented. As described in the Guidelines, the Restoration Administrator is requested to recommend a flow schedule showing the use of the entire annual allocation during the upcoming Restoration Year, categorize all recommended flows by account, and Restoration Flow recommendation. If a recommendation is not provided by the Restoration Administrator, the Capacity Constrained Default Flow Schedule (Table 6b) will be implemented.

Reclamation released a previous Restoration Allocation and Default Flow Schedule on February 5. This updated allocation increased the volume of water available to the Restoration Administrator for scheduling. There continue to be several complicated factors at play which can influence the 2021 Restoration Year schedule and strong coordination between parties is warranted. Restoration Administrator is requested to respond with a full written recommendation by March 15.

Forecasted Unimpaired Inflow

Unimpaired Runoff represents the natural water production of a river basin, unaltered by upstream diversions, storage, or by export or import of water to or from other watersheds (a.k.a "Unimpaired Inflow" or "Natural River" or "Full Natural Flow"). It is calculated for the period of a water year. The forecast of the Unimpaired Runoff determines the volume of Restoration Flows available for the Restoration Year (i.e. the Restoration Allocation). Information for forecasting the Unimpaired Runoff includes:

- Observation of Unimpaired Runoff into Millerton Lake to support the water supply allocation¹;
- The California Department of Water Resources (DWR) Bulletin 120 latest update for San Joaquin River inflow to Millerton Lake Unimpaired Flow, and/or the most current DWR Bulletin Water Supply Index (WSI)³;
- The National Weather Service (NWS) Ensemble Streamflow Prediction (ESP) Water Supply Forecast for the San Joaquin River at Millerton Lake^{5;}
- Other forecast models, ground-based observations, remotely-sensed observations, hydrologic models, analysis of historic patterns, and short-term weather forecasts as appropriate.

Table 1 shows the water year 2021 (October 1, 2020 to September 30, 2021) observed accumulated and forecasted water year Unimpaired Inflows at Millerton Lake. This table also includes the published DWR forecast, the DWR forecast adjusted for an expected runoff for the current month, the NWS forecast with and without a 7-day smoothing function applied to remove the day-to-day variance, and the NWS forecast with 7-day smoothing and adjustment for the expected runoff for the current month (Reclamation adjusts the DWR and NWS values by replacing the forecasted runoff for the current month with Reclamation's own estimate of runoff for the current month, which increases accuracy and incorporates the latest data). Figure 1a plots DWR and NWS forecast values over the entire water year, while Figure 1b shows the most recent period in detail.

Table 1 — San Joaquin River Water Year Actuals and Forecasts at Millerton Lake, inThousands of Acre-Feet (TAF)

	Forecast Exceedance Percentile					
-	90%	75%	50%	25%	10%	
Accumulated Unimpaired Runoff ("Natural River") February 18, 2021 ¹			79.5 TAF			
Accumulated Unimpaired Runoff as percent of normal ²	27%					
DWR, February 16, 2021 ³ (Published Value)	700	871 ⁷	1050	1265 ⁷	1471	
DWR, February 18, 2021 ⁴ (Runoff Adjusted)	697	853 ⁷	1021	1223 ⁷	1419	
NWS, February 18, 2021 (Published Daily Value ⁵)	486	663	860	1100	1610	
Smoothed NWS, February 18, 2021 (7-day Smoothing ⁶)	527	712	880	1272	1718	
Smoothed NWS, February 18, 2021 (Runoff Adjusted ⁴)	523	711	883	1276	1725	

¹ http://www.usbr.gov/mp/cvo/vungvari/milfln.pdf

² Based on average accumulation of Unimparired Runoff

³ B120: http://cdec.water.ca.gov/cgi-progs/iodir?s=b120, or B120 Update: http://cdec.water.ca.gov/cgi-progs/iodir_ss/b120up, or WSI: http://cdec.water.ca.gov/cgi-progs/iodir/WSI.2020

⁴ The adjusted data has been updated with the actual unimpaired inflow through the current date and projected out for the remainder of the month.

⁵ http://www.cnrfc.noaa.gov/water_resources_update.php?stn_id=FRAC1&stn_id2=FRAC1&product=WaterYear

⁶ The NWS smoothed data uses a 7-day triangular weighted moving average, where the most recent day (n) is given greater weight than each previous forecast day (n-1, 2, 3, etc.); this reduces noise stemming from ESP model input. The following formula is used: ((Forecast_n* 1) + (Forecast_{n-1}* 0.857) + (Forecast_{n-2}* 0.714) + (Forecast_{n-3}* 0.571) + (Forecast_{n-4}* 0.429) + (Forecast_{n-5}* 0.286) + (Forecast_{n-6}* 0.143)) / 4

⁷ Values at the 75% exceedance and 25% exceedance are interpolated.

Since the last update to the Restoration Allocation on February 5, the San Joaquin Watershed has received an average of 1.6" of precipitation. This amount of precipitation over the previous two weeks is consistent with the 75% exceedance forecasts provided by DWR and NWS, thus we have seen the 50% through 10% exceedance forecasts decline since the last allocation update.

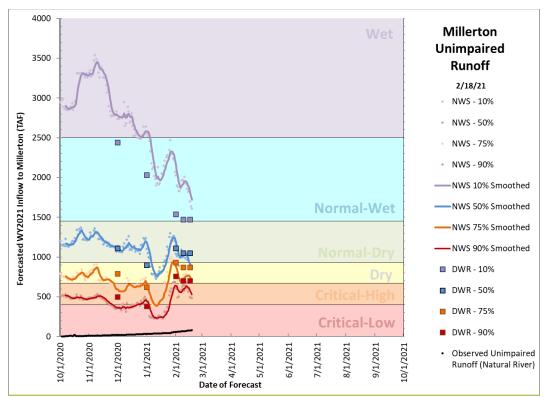


Figure 1a — Plot of 2021 Water Year forecasts, including both NWS Ensemble Streamflow Prediction Forecasts and DWR Forecasts

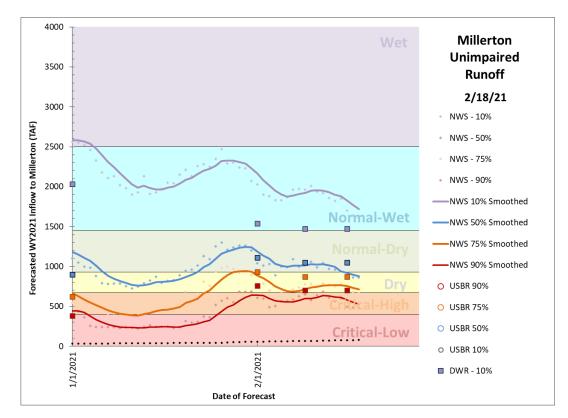


Figure 1b — Detail plot of most recent forecasts

The DWR Bulletin 120 forecast update from January 16 was interpolated to produce the full suite of forecasts exceedances, and the April-July runoff values were extended to the full water year values. The DWR B120 forecast was then adjusted by Reclamation to better align with observed runoff conditions to date. These steps are shown in Table 1. The DWR forecast has been trending higher than the NWS forecasts issued by the California–Nevada River Forecast Center (CNRFC). This difference can be partially explained by the fact that the NWS forecast looks at forecasted precipitation over the next 16 days, which are drier than normal. Reclamation also notes that the monthly climate predictions through the spring indicate dry conditions.

Currently there are four snowpack models operating for the San Joaquin Watershed to further inform runoff forecasts. There is generally fair agreement between the NWS model maintained by the CNRFC and the NWS NOHRSC model. The CU Boulder "Real-time SWE" model is higher than the others, primarily due to a higher estimate of snowpack in the uppermost elevation bands. The ARS iSnobal model is the lowest of the four as shown in Table 2. Examination of the ARS model indicates that its lower snowpack volume is due to much lower estimates in the highest elevation bands. All four models have similar predictions in the elevation bands between 5,000' and 8,000'.

The true snowpack volume of the highest elevation bands is difficult to discern, first because there are five "snow pillows" at automated weather stations that are not operational for various reasons. These stations are the highest elevation sites and without them, daily conditions can only be extrapolated from lower elevation stations. Second, some high elevation snow courses managed by DWR's California Cooperative Snow Survey were unable to be captured at the February 1 survey campaign. These snow course omissions were due to various field conditions and COVID restrictions. The CU Boulder model uses satellite imagery to estimate snowpack, and this model may be the best estimate we have of those highest alpine conditions. Reclamation has nudged its previous estimates of upper elevation snowpack somewhat higher in response to the CU Boulder model. Because runoff from high elevations is much more efficient than mid and low elevations, this snowpack uncertainty results in a large uncertainty in runoff. If there is more upper elevation snow than is shown in Reclamation's consensus estimate, then runoff would be higher than Reclamation's blended forecast shown in Table 3.

Table 2 — Total snowpack volume (TAF of Snow Water Equivalent) depicted by two models and a consensus estimate for February 18, 2021.

Date	CNRFC	NOHRSC	CU Boulder	ARS iSnobal	Aerial Snow Survey (ASO)	Reclamation Consensus
Snow Water Equivalent Volume (TAF)	734	748	878 ⁸	645 ⁹	N/A ¹⁰	739

⁸ CU Boulder "Real-time SWE" model was for February 15. The CU Boulder model does not estimate now below 5,000' elevation and therefore is likely missing 5 TAF in its estimate.

⁹ USDA-ARS "iSnobal" model for the San Joaquin is intermittently operational in 2021. Model data from February 16.

¹⁰ The first Aerial Snow Survey is scheduled until February 16 – March 2, 2021

Snowpack SWE is crucial for modeling future runoff. Using a water budget model developed by Reclamation, the consensus snowpack conditions support a 90% exceedance of between 543 and

610 TAF, and a 75% exceedance of between 653 TAF and 735 TAF. These experimental model predictions were used in part to guide how Reclamation combines multiple forecast sources into a single "hybrid" runoff forecast.

Combining Forecasts

Staff from the South-Central California Area Office of Reclamation and SJRRP jointly track and evaluate the accuracy of runoff forecasts on a regular basis. Based on the age of these forecasts, the short-term and long-term weather forecasts, the climatological outlook, observed Unimpaired Inflow, and other available information, a hybrid forecast is generated. The weighting of the different components is regularly evaluated and selected using professional judgment and the best available information. For the current allocation, the DWR "runoff adjusted" and NWS "smoothed runoff adjusted" forecasts are combined with a 20/80 blending respectively. This results in the Hybrid Unimpaired Inflow Forecasts shown in Table 3.

	Forecast Probability of Exceedance using blending					
	90%	75 %	50%	25%	10%	
Blending Ratio (DWR/NWS)	20/80					
Hybrid Unimpaired Inflow Forecast (TAF)	558	739	910	1266	1664	

Table 3 — Current Blending and Hybrid Unimpaired Inflow Forecast

This forecast blending produced on February 18 was chosen based on the historic performance of the DWR and NWS forecasts during this time of the year, the accuracy of these forecasts in predicting monthly unimpaired inflow over the recent months, snow measurements and snowpack models, application of hypothetical runoff ratios, the long-range forecast, the seasonal climate outlook, the age of the forecasts, and other performance factors. Reclamation notes that precipitation and runoff conditions in 2021 are similar to ten previous water years: 2020, 2007, 1992, 1990, 1976, 1963, 1961, 1959, 1930, and 1929. These historic analogs had a mean runoff of 925 TAF and a median runoff of 860 TAF and were also used to guide the blending by targeting a similar 50% exceedance.

As indicated above, because there is substantial uncertainty regarding high elevation snowpack, Reclamation's blending of these forecast products may change substantially once new data is available. Airborne Snow Observatory survey data should be available by the first week of March along with snow course measurements from the California Cooperative Snow Survey.

Restoration Allocation

As per the Restoration Flow Guidelines, the **75% exceedance** forecast is used for the allocation under current hydrologic conditions to set the Restoration Flow Allocation. Table 4 below, from the Guidelines version 2.1, depicts the progression of forecast exceedance used to set the Restoration Allocation.

			Date of Forecast Used for the Allocation					
	Value (TAF)	January	February	March	April	Мау	June	
	Above 2200	50	50	50	50	50	50	
If the EOV	1600 to 2200	75	75	50	50	50	50	
If the 50% forecast is:	900 to 1599	75	75	75	50	50	50	
iorecast is.	500 to 899	90	90	75	50	50	50	
	Below 500	90	90	90	90	75	50	

Table 4 — Guidance on Percent Exceedance Forecast to Use for Allocation

Applying the 20/80 forecast blending determined by Reclamation and, using the 75% exceedance forecast dictated by the Guidelines, Reclamation calculates an Unimpaired Inflow hybrid forecast of 739 TAF and a Dry Water Year Type. This provides a Restoration Allocation of 170.732 Thousand Acre-Feet (TAF) as measured at Gravelly Ford (GRF).

Combined with Holding Contracts on the San Joaquin River, this equates to a **Friant Dam Release of 287.678 TAF**. Other hypothetical allocations are presented in Table 5 as grayed values and indicate the range of probable forecasts and the resulting Restoration Allocations.

Table 5 — SJRRP Water Year Type and Allocation for 2021 Restoration Year Shown with
Other Hypothetical Values in Gray

	Fore	Forecast Probability of Exceedance using proposed blending					
	90% 75% 50% 25% 10%						
Hybrid Unimpaired Inflow Forecast (TAF)	558	739	910	1266	1664		
Water Year Type	Critical-High	Dry	Dry	Normal-Dry	Normal-Wet		
Restoration Allocation at GRF (TAF)	70.919	170.732	208.892	258.586	313.335		
Friant Dam Flow Releases (TAF)	187.785	287.678	325.837	375.531	430.280		

Contractual Obligation Considerations

Consistent with Section 10004(j) of the San Joaquin River Restoration Settlement Act, the Settlement and the Settlement Act do not modify the rights and obligations of the United States under the Purchase Contract between Miller and Lux and the United States (Purchase Contract) and the Second Amended Exchange Contact between the United States, Department of the Interior, Bureau of Reclamation and Central California Irrigation District, San Luis Canal Company, Firebaugh Canal Water District, and Columbia Canal Company (Exchange Contract). Reclamation's obligations in the Purchase Contract and Exchange Contract remain unchanged. This is consistent with Condition 17 of Reclamation's Water Right Permit, as modified in 2013.

Conditions continue to be dry across the CVP with limited Delta pumping. Restoration staff will continue to coordinate with other units of the CVP and their potential to impact operations or allocations at Friant.

Default Flow Schedule

The Default Flow Schedule, derived from Exhibit B in the Settlement, identifies how Reclamation will schedule the Restoration Allocation for the current Water Year Type and Unimpaired Inflow volume absent a recommendation from the Restoration Administrator. The Guidelines provide detail on how a Default Flow Schedule is parsed from the allocation volume. This approved method of distributing water throughout the year is referred to as "Method 3.1" with the "gamma pathway."

Exhibit B Method 3.1 Default Flow Schedules

Table 6a shows the Basic Default Flow Schedule flows and corresponding Restoration Allocation volumes for the entire year absent channel capacity and seepage constraints, including total releases from Friant Dam and Restoration Flows releases in excess of Holding Contracts. Volume is distributed as various flow rates across the year as per the methods explained in the Restoration Flow Guidelines.

Table 6b shows the Capacity Constrained Default Flow Schedule volumes with all expected operational constraints, primarily controlled by seepage limitations in Reach 4A. Any volume within the Spring Flexible Flow Account and Fall Flexible Flow Account that cannot be released on the default schedule is shifted to times with available capacity as per the Guidelines. This Capacity Constrained Default Flow Schedule depicted in Table 6b will be implemented in the absence of a specific recommendation by the Restoration Administrator. With these known constraints, a Restoration Flow volume of **1 TAF** is generated that cannot be scheduled for release without a Water Supply Test. This volume would become Unreleased Restoration Flows (URFs) under the Capacity Constrained Default Flow Schedule to-date, recapture of Restoration Administrator Recommendation, flow schedule to-date, recapture of Restoration Flows at Mendota Pool, and real-time assessments of groundwater constraints.

		Flow	v (cfs)		Volur	me (TAF)
Flow Period	Friant Dam Release	Holding Contracts ¹¹	Flow Target at GRF	Restoration Flow at GRF	Friant Dam Release	Restoration Flow at GRF
Mar 1 – Mar 15	500	130	375	370	14.876	11.008
Mar 16 – Mar 31	1500	130	1375	1370	47.603	43.478
Apr 1 – Apr 15	350	150	205	200	10.413	5.950
Apr 16 – Apr 30	350	150	205	200	10.413	5.950
May 1 – May 28	350	190	165	160	19.438	8.886
May 29 – Jun 30	311	190	126	121	20.365	7.929
July 1 – July 29	260	230	35	30	14.955	1.726
Jul 30 – Aug 31	260	230	35	30	17.018	1.964
Sep 1 – Sep 30	350	210	145	140	20.826	8.331
Oct 1 – Oct 31	350	160	195	190	21.521	11.683
Nov 1 – Nov 6	700	130	575	570	8.331	6.783
Nov 7 – Nov 10	700	130	575	570	5.554	4.522
Nov 11 – Nov 30	350	120	235	230	13.884	9.124
Dec 1 – Dec 31	350	120	235	230	21.521	14.142
Jan 1 – Jan 31	350	100	255	250	21.521	15.372
Feb 1 – Feb 28	350	100	255	250	19.438	13.884
				Totals	287.678	170.732

Table 6a — Basic Default Flow Schedule

		Flo	w (cfs)	Volume (TAF)			
Flow Period	Friant Dam Release	Holding Contracts	Flow Target at GRF	Restoration Flow at GRF	Friant Dam Release	Restoration Flow at GRF	Unreleased Restoration Flow ¹²
Mar 1 – Mar 15	551	130	426	421	16.387	12.519	0
Mar 16 – Mar 31	551	130	426	421	17.480	13.354	0.991
Apr 1 – Apr 15	571	150	426	421	16.982	12.519	0
Apr 16 – Apr 30	571	150	426	421	16.982	12.519	0
May 1 – May 28	611	190	426	421	33.922	23.369	0
May 29 – Jun 30	311	190	126	121	20.365	7.929	0
July 1 – July 29	260	230	35	30	14.955	1.726	0
Jul 30 – Aug 31	260	230	35	30	17.018	1.964	0
Sep 1 – Sep 30	350	210	145	140	20.826	8.331	0
Oct 1 – Oct 31	350	160	195	190	21.521	11.683	0
Nov 1 – Nov 6	551	130	426	421	6.555	5.008	0
Nov 7 – Nov 10	551	130	426	421	4.370	3.338	0
Nov 11 – Nov 30	425	120	310	305	16.844	12.084	0
Dec 1 – Dec 31	350	120	235	230	21.521	14.142	0
Jan 1 – Jan 31	350	100	255	250	21.521	15.372	0
Feb 1 – Feb 28	350	100	255	250	19.438	13.884	0
		·		Totals	286.686	169.741	0.991

Table 6b — Capacity Constrained Default Flow Schedule

¹¹ In recent years, Holding Contract demands have been higher than assumed under Exhibit B of the Settlement, in which case, flows at Friant are increased to achieve the Gravelly Ford Flow Target.

¹² This estimate of URF volume is based on the most constraining reach, with Spring Flexible Flows redistributed March 1 through May 28 as necessary and Fall Flexible Flows redistributed Sept 3 through December 28 as necessary up to channel capacity constraints. Actual URF volume will depend on the Restoration Administrator's recommendations.

Exhibit B Restoration Flow Budget

Table 7 shows the components of the annual water budget for March 1, 2021, through February 28, 2022 (i.e. the Restoration Year). The Continuity Flow Account, Spring Flexible Flow Account, Riparian Recruitment Flow Account, and Fall Flexible Flow Account reflect the Exhibit B hydrograph for the current Restoration Allocation. The expected 116.945 TAF for Holding Contracts is shown. The volume for each flow account may change with subsequent Restoration Allocations.

	Holding		Restoration	Flow Accounts		
Period	Contract Demand (TAF)	Continuity Flow Account	Spring Flexible Flow Account	Riparian Recruitment Flow Account	Fall Flexible Flow Account	
Feb 1 – Feb 28	-	0		-	-	
Mar 1 – Apr 30	16.920	25.428	40.959	-	-	
May 1 – May 28	10.552	10.552		0	-	
May 29 – Jul 29	25.666	25.666	_	U	-	
Jul 30 – Aug 31	15.055	15.055	_	-	-	
Sep 1 – Sep 30	12.496	12.496	_	-		
Oct 1 – Nov 30	17.117	10.175	-	-	6.942	
Dec 1 – Dec 31	7.378	7.378	_	_		
Jan 1 – Feb 28	11.702	11.702	-	-	-	
	116.945 ¹³		40.959	0	6.942	
	170.732 (Base Flow Volume)					
		287.678 (Friant Release Volume)				

Table 7 — Restoration Budget with Flow Accounts

¹³ In recent years, Holding Contract demands have been higher than assumed under Exhibit B of the Settlement, in which case, flows at Friant are increased to achieve the Gravelly Ford Flow Target.

¹⁴ Buffer Flow volumes are based on actual releases, and are not an allocated volume per se.

Remaining Flow Volumes

The amount of water remaining for scheduling is the volume of flows released from Friant Dam in excess of releases required to meet Holding Contract demands, less past releases. Table 8 tracks these balances among the four flow accounts. Tracking these four flow accounts is necessary for application of the Water Supply Test. The releases to date volumes are derived from quality-assurance/quality-control daily average data when available, and partly from provisional data posted to CDEC, and thus may have future adjustments. Such adjustments may also affect the remaining flow volume.

	Flow Account	Yearly Allocation ¹⁵ (TAF)	Released to Date ¹⁶ (TAF)	Remaining Flow Volume (TAF)
	Continuity Flow Account (Mar 1 — Feb 28)	122.831	0	122.831
Base Flows	Spring Flexible Flows (Mar 1 – Apr 30)	40.959	0	40.959
Base	Riparian Recruitment Flows (May 1 — Jul 29)	0	0	0
	Fall Flexible Flows (Oct 1 – Nov 30)	6.942	0	6.942
	Buffer Flows	—	0	—
Unrelea	ased Restoration Flows (Sales and Exchanges)	_	0	0
Unrelea	released Restoration Flows (Returned Exchanges) —		0	0
	Purchased Water		0	0
		Totals:	0	170.732

¹⁵ These Flow Volumes assume no channel constraints, as measured at Gravelly Ford.

¹⁶ As of 2/18/2021

Operational Constraints

Operating criteria, such as channel conveyance capacity, ramping rate constraints, scheduled maintenance, reservoir storage, contractual obligations, and downstream seepage concerns, may restrict the release of Restoration Flows. Table 9 summarizes known 2021 operational constraints.

Type of Constraint	Period	Flow Limitation
	Currently in effect	1,210 cfs in Reach 2B
Levee Stability	Currently in effect	1,070 cfs in Eastside Bypass
	Currently in effect, see	Reach 2A: 800 – 820 cfs @ GRF
Channel Conveyance / Seepage Limitation	latest Flow Bench Evaluation for precise	Reach 3: 850 cfs @ MEN
	values	Reach 4A: 260 – 300 cfs @ SDP
Merced NWR weir Removal	June – September 2021	100 cfs 3-day average flow rate in Eastside Bypass
USFWS Biological Opinion	Until consultation for "Phase 2"	1,660 cfs of Restoration Flows at Friant Dam (interpreted as 1,655 cfs at Gravelly Ford)

Table 9 — Summary of Operational Constraints

The 2021 Channel Capacity Report identifies a maximum flow in Reach 2B of 1,210 cfs due to levee stability constraints. This results in a maximum release from Friant Dam between 1,310 cfs and 1,540 cfs depending on the time of year. The 2021 Restoration Year Channel Capacity Report also identifies a maximum flow in the Middle Eastside Bypass of 1,070 cfs due to levee stability constraints. These values are unchanged from 2019. Reach O levee improvements were completed in 2020 and will allow an overall increase in then-existing capacity of the Middle Eastside Bypass to be documented in the 2022 Channel Capacity Report.

In 2020, multiple flow benches were conducted to verify expected seepage thresholds in Reach 2A and Reach 3. Analysis revealed a seepage limitation of 800 to 820 cfs in Reach 2A (measured at the GRF gauge) and 850 cfs in Reach 3 (measured at the MEN gauge). These seepage limitations fluctuate with prevailing groundwater conditions and may be slightly lower or higher at a given time. The limitation in Reach 3 must accommodate both Restoration Flows and diversion to Arroyo Canal, thus Reach 3 is currently the limiting reach in certain times of the year. SJRRP will coordinate with the Restoration Administrator on specific flow schedules that are close to these limits. Flow – groundwater relationships from October 2019 through January 2020 were examined to determine a new seepage limitation in Reach 4A. For the current Reach 4A seepage limitation, wells installed in 2017 and later were incorporated into the analysis. Inclusion of these additional data points revealed that the seepage limitation is a lower flow rate than previously expected. Ongoing examination of a flow bench conducted in late February has

not been completed, and when resolved may provide a narrower range of values for the seepage limitation in Reach 4A.

Reclamation will inform the Restoration Administrator of any changes to groundwater conditions that are likely to result in a reduction in scheduled Restoration Flows, will implement monitoring of groundwater conditions as necessary, and will adjust Friant Dam releases and/or Mendota Pool recapture (as preferred by the Restoration Administrator) to stay within seepage and channel capacity constraints.

Removal of the Merced National Wildlife Refuge weir is expected to take place between June and September. Based on the current information, a limitation of 100 cfs is expected. This limitation is based on a 3-day running average, allowing short period excursions of up to 120 cfs. This timing and rate of this flow limitation may be refined or negotiated closer to the project period.

2021 Allocation History

The Restoration Allocation will be adjusted multiple times between the date of the initial allocation and the final allocation; issuances will generally take place on a monthly schedule but may also be issued based on rapidly changing hydrologic conditions. The next Restoration Allocation is scheduled to be issued between March 10 and March 21. The Restoration Administrator is responsible for contingency planning and managing releases to stay within the current allocation to the extent possible, pursuant to the Restoration Flow Guidelines. Table 10 summarizes the Allocation History for this Restoration Year.

Allocation Type	Issue Date	Forecast Blending Applied	Unimpaired Inflow Forecast (at forecast exceedance)	Restoration Allocation at Gravelly Ford	Restoration Flows and URFs Released	
Initial	January 21, 2021	30/70	296 TAF (@ 90%)	0 TAF	0 (thru 1/20/2021)	
Update	February 5, 2021	50/50	657 TAF (@ 75%)	70.919 TAF	0 (thru 2/4/2021)	
Update	February 19, 2021	20/80	739 TAF (@ 75%)	170.732 TAF	0 (thru 2/4/2021)	

Table 10 — Allocation History

Appendix A: Abbreviations, Acronyms, and Glossary

Acre-feet							
USDA Agricultural Research Service							
Airborne Snow Observatory							
California Statewide Integrated Model							
Central California Irrigation District							
California Data Exchange Center							
cubic feet per second							
Central Valley Project							
Sacramento–San Joaquin Delta							
California Department of Water Resources							
Ensemble Streamflow Prediction							
Exhibit B of the Settlement depicting Default Hydrograph							
Gravelly Ford Flow Gauge							
Restoration Flow Guidelines							
Lower San Joaquin Levee District							
National Aeronautics and Space Administration							
National Weather Service							
Quality Assurance/Quality Control (i.e. finalized)							
U.S. Department of the Interior, Bureau of Reclamation							
the cycle of Restoration Flows, March 1 through							
February 28/29							
February 28/29							
February 28/29 SJRRP Reclaimed Water Account							
February 28/29 SJRRP Reclaimed Water Account U.S. Secretary of the Interior Stipulation of Settlement in <i>NRDC, et al., v. Kirk</i>							
February 28/29 SJRRP Reclaimed Water Account U.S. Secretary of the Interior Stipulation of Settlement in <i>NRDC, et al., v. Kirk</i> <i>Rodgers, et al.</i>							
February 28/29 SJRRP Reclaimed Water Account U.S. Secretary of the Interior Stipulation of Settlement in <i>NRDC, et al., v. Kirk</i> <i>Rodgers, et al.</i> San Joaquin River Exchange Contractors							
February 28/29 SJRRP Reclaimed Water Account U.S. Secretary of the Interior Stipulation of Settlement in <i>NRDC, et al., v. Kirk</i> <i>Rodgers, et al.</i> San Joaquin River Exchange Contractors San Joaquin River Restoration Program							
February 28/29 SJRRP Reclaimed Water Account U.S. Secretary of the Interior Stipulation of Settlement in <i>NRDC, et al., v. Kirk</i> <i>Rodgers, et al.</i> San Joaquin River Exchange Contractors San Joaquin River Restoration Program San Luis Canal Company							
February 28/29 SJRRP Reclaimed Water Account U.S. Secretary of the Interior Stipulation of Settlement in <i>NRDC, et al., v. Kirk</i> <i>Rodgers, et al.</i> San Joaquin River Exchange Contractors San Joaquin River Restoration Program San Luis Canal Company Snow Water Equivalent							
February 28/29 SJRRP Reclaimed Water Account U.S. Secretary of the Interior Stipulation of Settlement in <i>NRDC, et al., v. Kirk</i> <i>Rodgers, et al.</i> San Joaquin River Exchange Contractors San Joaquin River Restoration Program San Luis Canal Company Snow Water Equivalent thousand acre–feet							

Appendix B: Previous Year (2019) Flow Accounting

Table B — Restoration Flow Accounting and Unreleased Restoration Flows, and Holding Contracts, for the period February 2019 through February 2020. Flood management releases to San Joaquin River occurred during March, April, May, June, and July. This accounting includes 1.905 TAF that was generated in the 2019 Restoration Year and advanced into the final days of February 2019 (to the 2018 Restoration Year) and a flood spill of 22.509 TAF of URFs in July.

	Gravelly Ford 5 cfs requirement (TAF)	Released Restoration Flow Volumes (TAF)								
Flow Period		Spring Flexible Flow	Summer Base Flow	Fall Flexible Flow	Winter Base Flow	Riparian Recruitment Flow	Buffer Flow	Flexible Buffer Flow	URFs (TAF)	
Feb 1 – Feb 28	_	1.905	_	_	_	_	_	_	_	
Mar 1 – Mar 31	15.886	20.291	-	-	_	_	0	-	138.949	
Apr 1 – Apr 30	0.276	20.158	_	_	_	-	0	_	80.000	
May 1 – May 31	44.031	5.708	9.838	_	_			0	80.006	
Jun 1 – Jun 30	10.102	_	9.164	_	_		0		23.999	
Jul 1 – Jul 31	7.462	_	7.379	_	_	17.799	0 0		26.509	
Aug 1 – Aug 31	10.873	_	11.633	_	_				14.244	
Sep 1 – Sep 30	11.413	_	11.623	_	_	_	0		_	
Oct 1 – Oct 31	11.117	_	_	12.732	_	_	0		_	
Nov 1 – Nov 30	10.364	_	_	13.896	_	_	0	0	_	
Dec 1 – Dec 31	9.429	_	_	14.392	_	_	0		_	
Jan 1 – Jan 31	9.749	-	-	_	15.602	_	0	_	-	
Feb 1 – Feb 28	11.060	0	_	_	17.153	_	0	_	2.053	
10020		19.454	49.637	41.020	32.755	17.799				
			190.666 0.000						365.760	
	151.761	190.666								
	556.426 (2019 Allocation: 556.542 + 0 Returned Exchange = error of 0.116 TAF)									
		I		7	708.187					
	151.761	556.426								

Note: minor changes to 2019 data was made in September of 2020 and is reflected here.

Appendix C: History of Millerton Unimpaired Runoff

Water Year	Unimpaired Runoff ² (Natural River)	SJRRP Water Year Type ³		Water Year ¹	Unimpaired Runoff ² (Natural River)	SJRRP Water Year Type ³	Water Year ¹	Unimpaired Runoff ² (Natural River)	SJRRP Water Year Type ³
1931	480.2	Critical-High		1963	1,945.266	Normal-Wet	1995	3,876.370	Wet
1932	2,047.4	Normal-Wet		1964	922.351	Dry	1996	2,200.707	Normal-Wet
1933	1,111.4	Normal-Dry		1965	2,271.191	Normal-Wet	1997	2,817.670	Wet
1934	691.5	Dry		1966	1,298.792	Normal-Dry	1998	3,160.759	Wet
1935	1,923.2	Normal-Wet		1967	3,233.097	Wet	1999	1,527.040	Normal-Wet
1936	1,853.3	Normal-Wet		1968	861.894	Dry	2000	1,735.653	Normal-Wet
1937	2,208.0	Normal-Wet		1969	4,040.864	Wet	2001	1,065.318	Normal-Dry
1938	3,688.4	Wet		1970	1,445.837	Normal-Dry	2002	1,171.457	Normal-Dry
1939	920.8	Dry		1971	1,416.812	Normal-Dry	2003	1,449.954	Normal-Dry
1940	1,880.6	Normal-Wet		1972	1,039.249	Normal-Dry	2004	1,130.823	Normal-Dry
1941	2,652.5	Wet		1973	2,047.585	Normal-Wet	2005	2,826.872	Wet
1942	2,254.0	Normal-Wet		1974	2,190.308	Normal-Wet	2006	3,180.816	Wet
1943	2,053.7	Normal-Wet		1975	1,795.922	Normal-Wet	2007	684.333	Dry
1944	1,265.4	Normal-Dry		1976	629.234	Critical-High	2008	1,116.790	Normal-Dry
1945	2,134.633	Normal-Wet		1977	361.253	Critical-Low	2009	1,455.379	Normal-Wet
1946	1,727.115	Normal-Wet		1978	3,402.805	Wet	2010	2,028.706	Normal-Wet
1947	1,121.564	Normal-Dry		1979	1,829.988	Normal-Wet	2011	3,304.824	Wet
1948	1,201.390	Normal-Dry		1980	2,973.169	Wet	2012	831.582	Dry
1949	1,167.008	Normal-Dry		1981	1,067.757	Normal-Dry	2013	856.626	Dry
1950	1,317.457	Normal-Dry		1982	3,317.171	Wet	2014	509.579	Critical-High
1951	1,827.254	Normal-Wet		1983	4,643.090	Wet	2015	327.410	Critical-Low
1952	2,840.854	Wet		1984	2,042.750	Normal-Wet	2016	1,300.986	Normal-Dry
1953	1,226.830	Normal-Dry		1985	1,135.975	Normal-Dry	2017	4,395.400	Wet
1954	1,313.993	Normal-Dry		1986	3,031.600	Wet	2018	1,348.979	Normal-Dry
1955	1,161.161	Normal-Dry		1987	756.853	Dry	2019	2,734.772	Wet
1956	2,959.812	Wet		1988	862.124	Dry	2020	886.025	Dry
1957	1,326.573	Normal-Dry		1989	939.168	Normal-Dry			
1958	2,631.392	Wet]	1990	742.824	Dry			
1959	949.456	Normal-Dry		1991	1,027.209	Normal-Dry			
1960	826.021	Dry]	1992	807.759	Dry			
1961	647.428	Critical-High		1993	2,672.322	Wet			
1962	1,924.066	Normal-Wet		1994	824.097	Dry			

 Table C — Water Year Totals in Thousand Acre-Feet

¹ Water year is from Oct 1 through Sept 30, for example the 2010 water year began Oct 1, 2009. Unimpaired Runoff is based on Reclamation calculations, and hypothetical water year types are shown here; actual Restoration water year types are based on the final allocation, which may sometimes differ slightly from the calculated water year total.

² Also known as "Natural River" or "Unimpaired Inflow into Millerton" – This is the total runoff that would flow into Millerton Lake if there were no dams or diversions upstream. There was a lower level of precision prior to 1945.

³ The six SJRRP Water Year Types are based on unimpaired inflow and are not updated as climatology changes. Critical-Low= <400 TAF, Critical-High=400-669.999 TAF, Dry= 670-929.999 TAF, Normal-Dry 930-1449.999, Normal-Wet 1450-2500, Wet>2500

Appendix D: Final Restoration Allocations and Error

	Table D — History of Restoration Anocations								
Year	Туре	Date of Final Allocation Issuance ²	Unimpaired Runoff Forecast in Final Allocation (TAF)	Restoration Allocation in Final Issuance (TAF)	Observed Unimpaired Runoff on Sep. 30 (TAF)	Error (Unimpaired Runoff / Allocation)			
2009	Interim Flows			261.5	1,455.379	_			
2010	Interim Flows			98.2	2,028.706	—			
2011	Interim Flows			152.4	3,304.824	—			
2012	Interim Flows			183	831.582	—			
2013	Interim Flows			65.5	856.626	—			
2014	Restoration Flows	Mar 3	518	0 ¹	509.579	+8.421 / 0 ¹			
2015	Restoration Flows	Sep 28	327	0	327.410	-0.410 / 0			
2016	Restoration Flows	Sep 30	1300.986	263.295	1,300.986	0 / 0			
2017	Restoration Flows	Jul 10	4,444	556.542	4,395.400	+48.600 / 0			
2018	Restoration Flows	May 22	1,427	280.258	1,348.979	+78.021 / +10.503			
2019	Restoration Flows	May 20	2,690	556.542	2,734.772	-44.772 / 0			
2020	Restoration Flows	June 19	880	202.197	886.025	-6.025 / -1.345			

Table D — History of Restoration Allocations

¹ No water was provided under this Critical-High designation due to necessity for Friant Dam to release flows for the Exchange Contract.

² In 2018 with the completion of Version 2.0 of the Restoration Flows Guidelines, the date of final Restoration Allocation issuance was advanced from September 30 to either May or June.